


**CreativeWEAVE**

form function solution

*Mira 390x20*



WORLD WIDE WEAVE

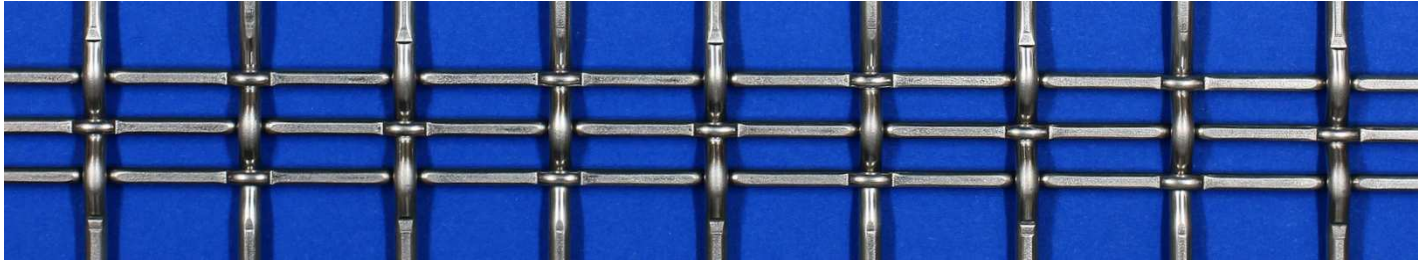

## Technische Daten    Technical Data Sheet / Fiche Technique / Información Técnica

<b>Werkstoff</b> Material / Matériau / Material	<b>Edelstahl 1.4404 ( AISI 316L )</b> Stainless Steel / Acier inoxydable / Acero inoxidable	
<b>Freie Fläche</b> Open area / Surface ouverte / Superficie abierta	ca. 72 %	
<b>Drahtstärke</b> Wire diameter / Diamètre des fils / Diametro de hilos	<b>Kettdraht gekröpft:</b> 3 x 2 mm Crimped wire / fil ondulé / hilo ondulado	<b>Schussdraht gekröpft:</b> 3 mm Crimped wire / fil ondulé / hilo ondulado
<b>Teilung Draht 2 mm:</b> Pitch 2 mm wires / Entraxe fils 2 mm / Paso hilos 2 mm	90 mm	
<b>Teilung Draht 3 mm:</b> Pitch 3 mm wires / Entraxe fils 3 mm / Paso hilos 3 mm	20 mm	
<b>Dicke</b> Thickness / Epaisseur / Espesor	ca. 6,0 mm	
<b>Gewicht</b> Weight / Poids / Peso	ca. 3,7 kg/m <sup>2</sup>	
<b>Maximale Gewebebreite</b> Maximum mesh width / Largeur maximale / Ancho máximo	4 m	
<b>Maximale Gewebelänge</b> Maximum mesh length / Longueur de tissu maximale/ Longitud maxima de la tela	24 m	
<b>Standardbefestigung</b> Standard fixing detail Fixation standard Sujeción standard	<b>Klemmprofil</b> Clamping profiles Profiles de serrage Perfiles de aprieto	

