


Product Specifications

Flexible, one direction

Material	AISI Type 316 SS
Open Area	64%
Weight	1.30 lbs/sqft
Nominal Thickness	0.244"
Cable	0.075"
Rod	0.115"
C - C cable	3.125" adjusted for horizontal pixel pitch
C - C rod	0.4375"
Max. width	26'
Max. length	80'
Vertical LED Pitch	1.3' - 13'
Horizontal LED Pitch	4" typical
NITS	Highly variable
Viewing Distance	Wide ranging

Illumesh is protected under patent 8,056,586 B2. Other patents may apply.

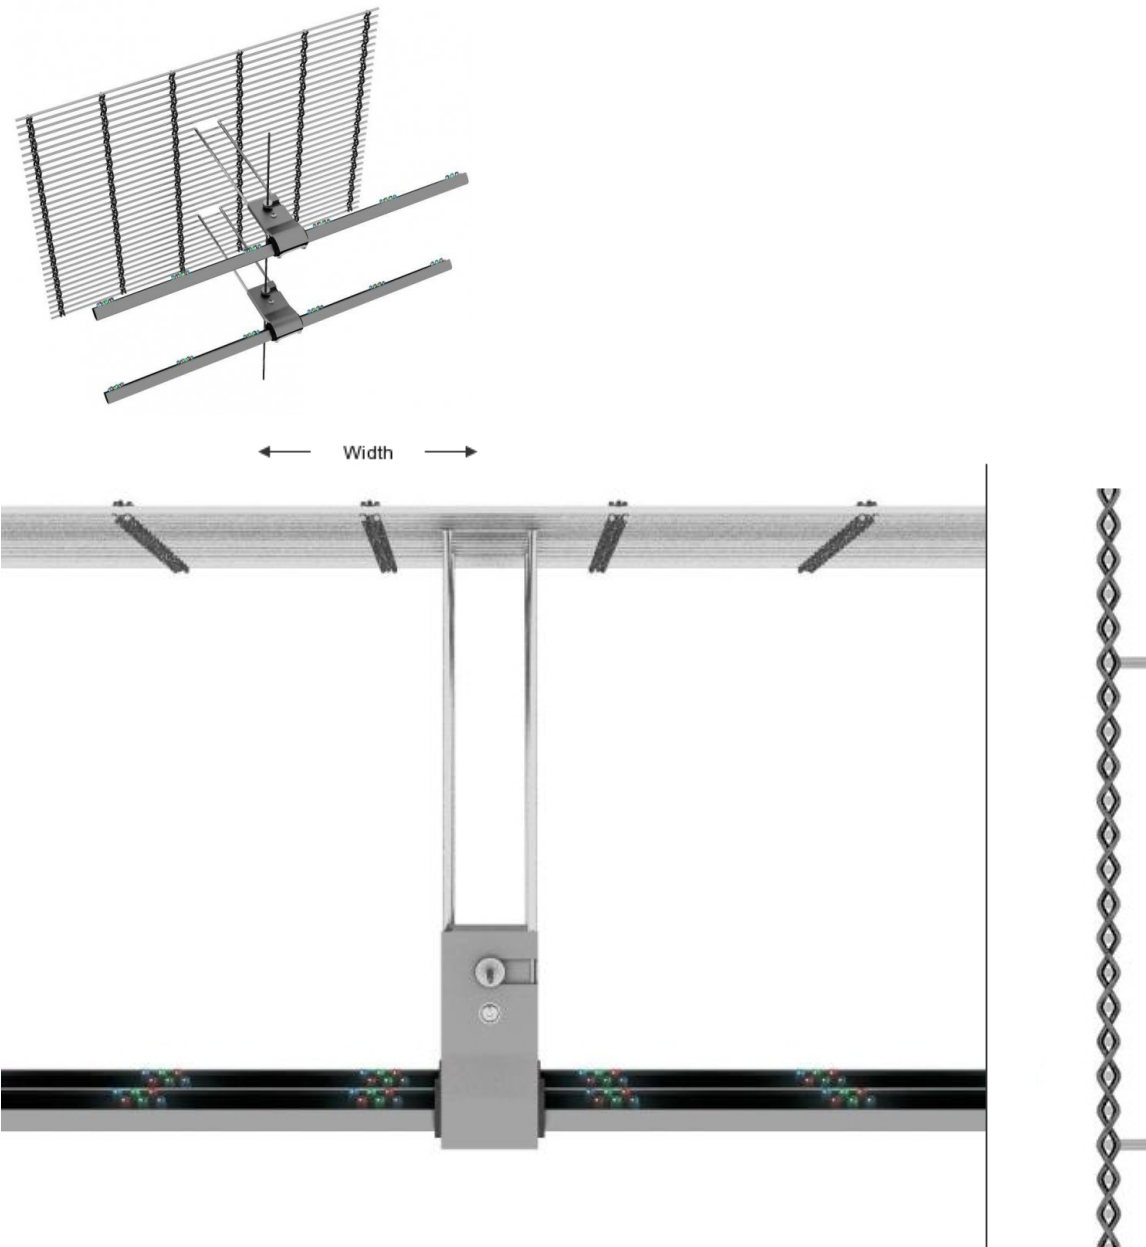

System Components

Woven-in bar with eyebolt

Applications

Illumesh®

North American Headquarters

GKD-USA Inc
 825 Chesapeake Drive
 Cambridge MD 21613
 T 800-453-8616
 T 410-221-0542
 F 410-221-0544
 sales@gkdusa.com
 gkdmetalfabrics.com

