

## Product Specifications

Flexible, one direction

<b>Material</b>	AISI Type 316 SS
<b>Open Area</b>	57%
<b>Weight</b>	1.83 lbs/sqft
<b>Nominal Thickness</b>	0.875"
<b>Cable</b>	0.075" x 3
<b>Rod</b>	0.115"
<b>C - C cable</b>	100 mm
<b>Max. width</b>	13'
<b>Max. length</b>	Consult GKD
<b>Vertical LED Pitch</b>	50 mm
<b>Horizontal LED Pitch</b>	50 mm
<b>NITS</b>	7000
<b>Viewing Distance</b>	~115'

## System Components

Flats with clevis  
Woven-in bar with spring  
Woven-in bar with eyebolt

## Applications

Mediamesh®


### North American Headquarters

GKD-USA Inc  
825 Chesapeake Drive  
Cambridge MD 21613  
T 800-453-8616  
T 410-221-0542  
F 410-221-0544  
sales@gkdusa.com  
gkdmetalfabrics.com



Mediamesh values shown here are based on a standard configuration of pixel pitches. Not to scale.

Mediamesh is protected under patent 7,513,644 B2. Other patents may apply.

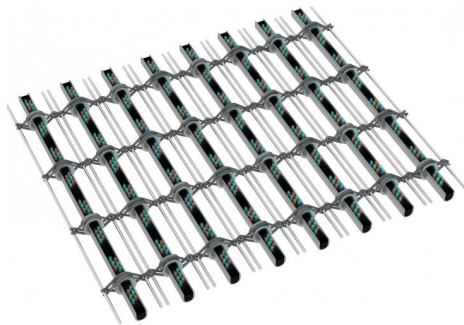

← Width →

